




MINIMAX 60 W SKIMMER

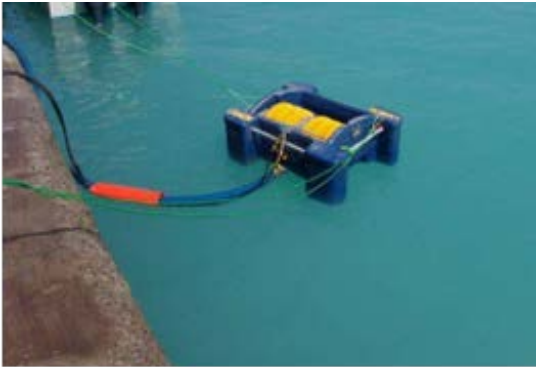

Inventory

	Great Lakes	Québec	Atlantic	Total
Minimax 60 W	-	1	6	7

Application

Suitable for the recovery of light to high viscosity oil. Suitable for shoreline and sheltered water usage. Can be deployed from shoreline, vessel or recovery barge.

Description

An oleophilic brush wheel, built of fibreglass with aluminium reinforcing. The oil is picked off the water by the rotating bristles and scraped off into a sump. An external pump moves the recovered oil to an external storage unit.

Operating Data

Nominal recovery rate: 60 tons/hr
De-rated recovery rate: 288 tons/day

Ancillaries

35 kW power pack
External DOP 160 pump

Technical Data

Length: 1.33 m
Width: 1.05 m
Height: 0.935 m
Weight: 127 kg

ECRC~SIMEC
Suite 1201, 275 Slater Street, Ottawa K1P 5H9
Phone (613) 230-7369 Fax (613) 230-7344
Web: www.ecrc-simec.ca