




# GT-260/GT-185 SKIMMERS

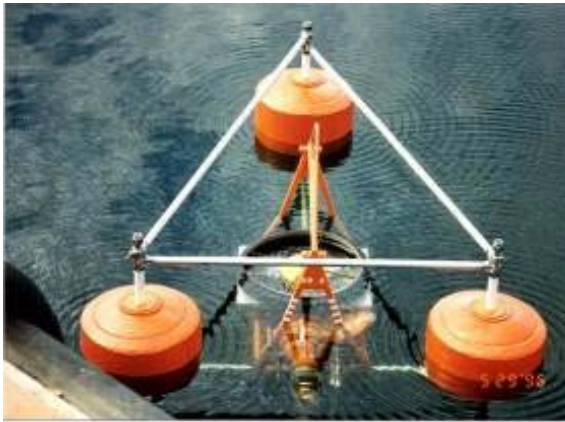

## Inventory

	Great Lakes	Québec	Atlantic	Total
GT-185	-	4	7	11
GT-260	-	-	2	2
<b>Total</b>	-	<b>4</b>	<b>9</b>	<b>13</b>

## Application

Suitable for the recovery of light to high viscosity oil. Suitable for shoreline, sheltered and open water usage. Can be deployed from shoreline, dock, vessel of opportunity or recovery barge. Used in conjunction with the NOFI Sweep system from a large recovery barge.

## Description

A weir skimmer, equipped with an Archimedean screw pump, installed in the middle section. Hydraulically driven by an external power pack. The height of the weir is adjusted by varying the pumping rate, and this to maximise the recovery of product with a minimum quantity of water.

## Operating Data

	<u>GT-185</u>	<u>GT-260</u>
Nominal recovery rate: (tons/hr)	45	90
De-rated recovery rate: (tons/hr)	9	18

## Ancillaries

Hydraulic power pack – diesel  
Remote control  
Hydraulic hoses  
Discharge hoses with floaters

## Technical Data

	<u>Skimmer head</u>		<u>Power pack</u>	
	<b>GT-185</b>	<b>GT-260</b>	<b>GT-185</b>	<b>GT-260</b>
Length:	2.3 m (7 ft 7 in)	3.5 m (11 ft 6 in)	1.3 m (4 ft 3 in)	2.0 m (6 ft 7 in)
Width:	1.9 m (6 ft 3 in)	1.9 m (6 ft 3 in)	1.0 m (3 ft 3 in)	1.3 m (4 ft 3 in)
Height:	1.0 m (3 ft 3 in)	2.2 m (7 ft 3 in)	1.1 m (3 ft 7 in)	2.0 m (6 ft 7 in)
Weight:	182 kg (400 lbs)	220 kg (485 lbs)	640 kg (1,410 lbs)	865 kg (1,910 lbs)

ECRC~SIMEC

Suite 1201, 275 Slater Street, Ottawa K1P 5H9

Phone (613) 230-7369 Fax (613) 230-7344

Web: [www.ecrc-simec.ca](http://www.ecrc-simec.ca)