




# DISC SKIMMERS

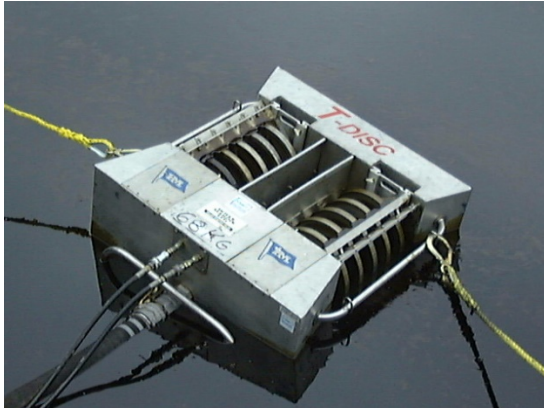

## Inventory

	Great Lakes	Québec	Atlantic	Total
T-12	1	4	2	7
T-18	1	3	3	7
<b>Total</b>	<b>2</b>	<b>7</b>	<b>5</b>	<b>14</b>

## Application

Suitable for the recovery of light to medium viscosity oil. Suitable for shoreline and sheltered use. Can be deployed from shoreline, dock or small boat.

## Description

An oleophilic disc skimmer, either equipped with a diaphragm pump, installed in the middle section (T-18) or using an external pumping mechanism (T-12). Hydraulically driven by an external power pack. The RPM of the disk is adjusted, according to the viscosity of oil, in order to minimise water pick up.

## Operating Data

	T-12	T-18
Nominal recovery rate: (t/day)	288	444
De-rated recovery rate: (t/day)	57.6	88.8

## Ancillaries

Hydraulic power pack – diesel  
Hydraulic hoses  
Discharge hoses

## Technical Data

	T-12	T-18
Length:	1.2 m (3 ft. 11 in)	1.3 m (4 ft. x 3 in)
Width:	1.0 m (3 ft. x 4 in)	1.2 m (3 ft. x 11 in)
Height:	0.5 m (1 ft. x 7 in)	0.6 m (1 ft. x 11 in)
Weight:	68 kg (150 lbs)	150 kg (330 lbs)